




曳引链

DRAG CHAINS

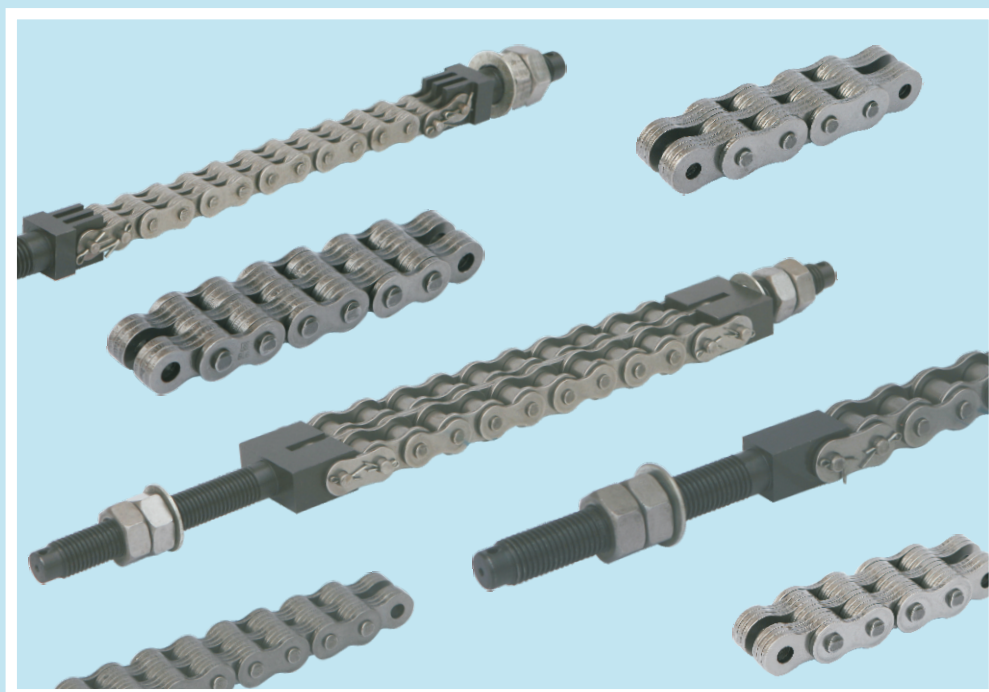


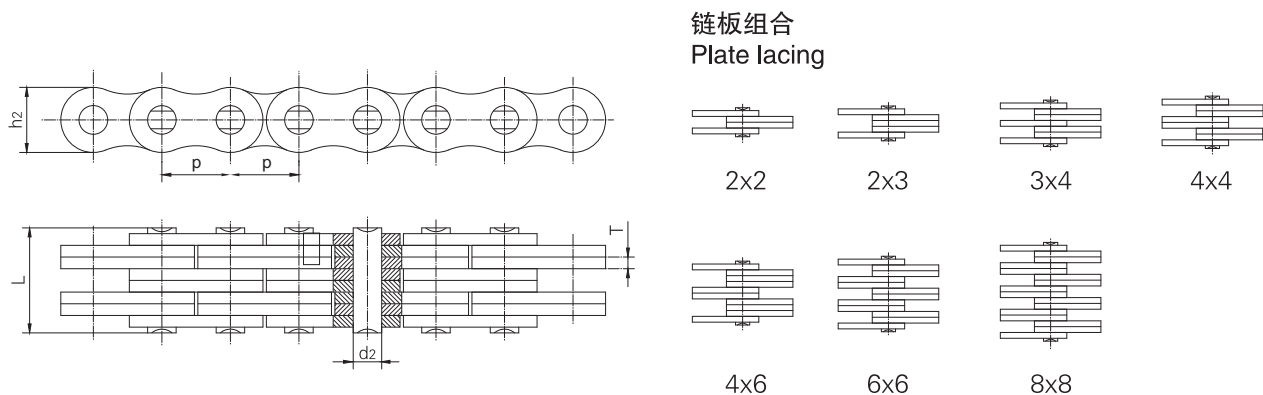


链号 Chain No.		节距 Pitch	板数 组合 Lacing	链板 高度 plates depth	链板 厚度 Plate thickness	销轴 直径 Pin diameter	铆接销 轴高度 Width over riveted pins	内链板 孔径 Hole diameter of inner plates	抗拉 强度 Ultimate tensile strength	每米 重量 Mass per meter
GB ISO DIN	ASME	p		h2 max	T max	d2 max	L max	d1 min	Fu min	q ≈
		mm		mm	mm	mm	mm	mm	kN	kg/m
LH0822	BL422	12.70	2 × 2	12.07	2.08	5.09	11.1	5.11	22.2	0.64
LH0823	BL423		2 × 3				13.2		22.4	0.80
LH0834	BL434		3 × 4				17.4		33.4	1.12
LH0844	BL444		4 × 4				19.6		44.5	1.28
LH0846	BL446		4 × 6				23.8		44.5	1.60
LH0866	BL466		6 × 6				28.0		66.7	1.92
LH0888	BL488		8 × 8				36.4		88.8	2.56
LH1022	BL522	15.875	2 × 2	15.09	2.48	5.96	12.9	5.98	33.4	0.88
LH1023	BL523		2 × 3				15.4		33.4	1.10
LH1034	BL534		3 × 4				20.4		48.9	1.50
LH1044	BL544		4 × 4				22.8		66.7	1.80
LH1046	BL546		4 × 6				27.7		66.7	2.20
LH1066	BL566		6 × 6				32.7		100.1	2.65
LH1088	BL588		8 × 8				42.6		133.6	3.50
LH1222	BL622	19.05	2 × 2	18.11	3.30	7.94	17.4	7.96	48.9	1.45
LH1223	BL623		2 × 3				20.8		48.9	1.80
LH1234	BL634		3 × 4				27.5		75.6	2.50
LH1244	BL644		4 × 4				30.8		97.9	2.90
LH1246	BL646		4 × 6				37.5		97.9	3.60
LH1266	BL666		6 × 6				44.2		146.8	4.30
LH1288	BL688		8 × 8				57.6		195.6	5.80
LH1622	BL822	25.40	2 × 2	24.13	4.09	9.54	21.4	9.56	84.5	2.20
LH1623	BL823		2 × 3				25.5		84.5	2.70
LH1634	BL834		3 × 4				33.8		129.0	3.80
LH1644	BL844		4 × 4				37.9		169.0	4.30
LH1646	BL846		4 × 6				46.2		169.0	5.40
LH1666	BL866		6 × 6				54.5		253.6	6.50
LH1688	BL888		8 × 8				71.0		338.0	8.60

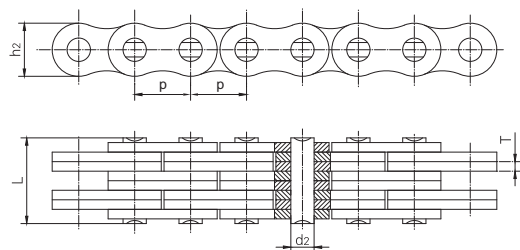


链板组合
Plate lacing

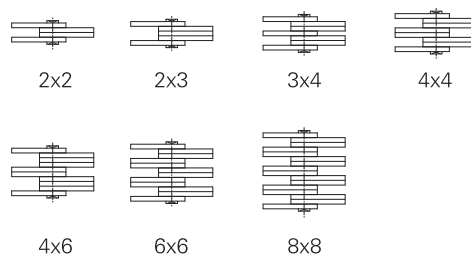

链号 Chain No.		节距 Pitch	板数 组合 Lacing	链板 高度 plates depth	链板 厚度 Plate thickness	销轴 直径 Pin diameter	铆接销 轴高度 Width over riveted pins	内链板 孔径 Hole diameter of inner plates	抗拉 强度 Ultimate tensile strength	每米 重量 Mass per meter
GB ISO DIN	ASME	p		h2 max	T max	d2 max	L max	d1 min	Fu min	q ≈
		mm		mm	mm	mm	mm	mm	kN	kg/m
LH2022	BL1022	31.75	2 × 2	30.18	4.90	11.11	25.4	11.14	115.60	3.40
LH1023	BL1023		2 × 3				30.4		115.60	4.30
LH2034	BL1034		3 × 4				40.3		182.40	6.00
LH2044	BL1044		4 × 4				45.2		231.30	6.90
LH2046	BL1046		4 × 6				55.1		231.30	8.60
LH2066	BL1066		6 × 6				65.0		347.00	10.30
LH2088	BL1088		8 × 8				84.8		462.40	13.80
LH2422	BL1222	38.10	2 × 2	36.20	5.77	12.71	29.7	12.74	151.20	4.60
LH2423	BL1223		2 × 3				35.5		151.20	5.80
LH2434	BL1234		3 × 4				47.1		244.60	8.10
LH2444	BL1244		4 × 4				52.9		302.50	9.30
LH2446	BL1246		4 × 6				64.6		302.50	11.60
LH2466	BL1266		6 × 6				76.2		453.70	13.90
LH2488	BL1288		8 × 8				99.4		604.80	18.60
LH2822	BL1422	44.45	2 × 2	42.24	6.60	14.29	33.6	14.31	191.30	6.10
LH2823	BL1423		2 × 3				40.2		191.30	7.60
LH2834	BL1434		3 × 4				53.4		315.80	10.60
LH2844	BL1444		4 × 4				60.0		382.60	12.20
LH2846	BL1446		4 × 6				73.2		382.60	15.20
LH2866	BL1466		6 × 6				86.4		578.30	18.20
LH2888	BL1488		8 × 8				112.3		765.20	24.30
LH3222	BL1622	50.80	2 × 2	48.26	7.52	17.46	40.0	17.49	289.10	8.00
LH3223	BL1623		2 × 3				46.6		289.10	10.00
LH3234	BL1634		3 × 4				61.8		440.40	14.00
LH3244	BL1644		4 × 4				69.3		578.30	16.00
LH3246	BL1646		4 × 6				84.5		578.30	20.00
LH3266	BL1666		6 × 6				100.0		857.40	24.00
LH3288	BL1688		8 × 8				129.8		1156.40	32.00
LH4022	BL2022	63.50	2 × 2	60.33	9.91	23.81	51.8	23.84	433.70	15.80
LH4023	BL2023		2 × 3				61.7		433.70	19.80
LH4034	BL2034		3 × 4				81.7		649.40	27.70
LH4044	BL2044		4 × 4				91.6		867.40	31.60
LH4046	BL2046		4 × 6				111.5		867.40	39.50
LH4066	BL2066		6 × 6				131.4		1301.10	47.40
LH4088	BL2088		8 × 8				171.2		1734.80	63.20

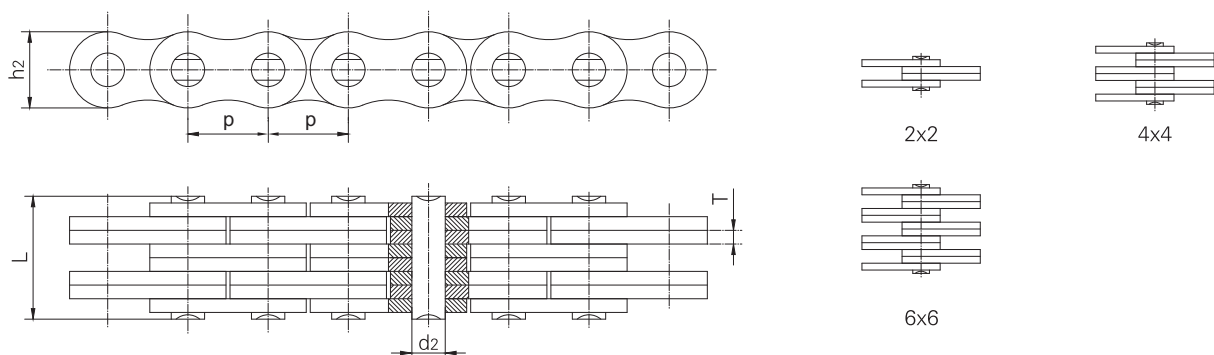

链号 Chain No.	节距 Pitch	板数 组合 Lacing	链板 高度 plates depth	链板 厚度 Plate thickness	销轴 直径 Pin diameter	铆接销 轴高度 Width over riveted pins	内链板 孔径 Hole diameter of inner plates	抗拉 强度 Ultimate tensile strength	每米 重量 Mass per meter
DIN/ISO DIN	p		h ₂ max	T max	d ₂ max	L max	d ₁ min	F _u min	q ≈
	mm		mm	mm	mm	mm	mm	kN	kg/m
LL0822	12.7	2X2	10.92	1.55	4.45	8.5	4.46	18.0	0.40
LL0844		4X4				14.6		36.0	0.80
LL0866		6X6				20.7		54.0	1.20
LL1022	15.875	2X2	13.72	1.65	5.08	9.3	5.09	22.0	0.50
LL1044		4X4				16.1		44.0	1.00
LL1066		6X6				22.9		66.0	1.50
LL1222	19.05	2X2	16.13	1.9	5.72	10.7	5.73	29.0	0.70
LL1244		4X4				18.5		58.0	1.30
LL1266		6X6				26.3		87.0	2.00
LL1622	25.4	2X2	21.08	3.2	8.28	17.2	8.3	60.0	1.50
LL1644		4X4				30.2		120.0	3.00
LL1666		6X6				43.2		180.0	4.40
LL2022	31.75	2X2	26.42	3.7	10.19	20.1	10.21	95.0	2.30
LL2044		4X4				35.1		190.0	4.40
LL2066		6X6				50.1		285.0	6.60
LL2422	38.1	2X2	33.4	5.2	14.63	28.4	14.65	170.0	4.40
LL2444		4X4				49.4		340.0	8.50
LL2466		6X6				70.4		510.0	12.50
LL2822	44.45	2X2	37.08	6.45	15.9	34.0	15.92	200.0	5.40
LL2844		4X4				60.0		400.0	10.50
LL2866		6X6				86.0		600.0	15.50
LL3222	50.8	2X2	42.29	6.45	17.81	35.0	17.83	260.0	6.20
LL3244		4X4				61.0		520.0	12.10
LL3266		6X6				87.0		780.0	18.00
LL4022	63.5	2X2	52.96	8.25	22.89	44.7	22.91	360.0	10.30
LL4044		4X4				77.9		720.0	20.00
LL4066		6X6				111.1		1080.0	29.50
LL4822	76.2	2X2	63.88	10.3	29.24	56.1	29.26	560.0	18.50
LL4844		4X4				97.4		1120.0	35.70
LL4866		6X6				138.9		1168.0	53.00

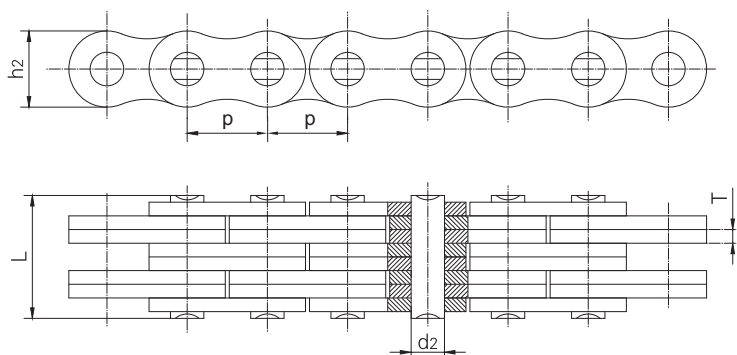

链板组合
Plate lacing



2x2



3x4




4x4




6x6

链号 Chain No.	节距 Pitch	板数 组合 Lacing	链板 高度 plates depth	链板 厚度 Plate thickness	销轴 直径 Pin diameter	铆接销 轴高度 Width over riveted pins	内链板 孔径 Hole diameter of inner plates	抗拉 强度 Ultimate tensile strength	每米 重量 Mass per meter
ANSI	p		h ₂ max	T max	d ₂ max	L max	d ₁ min	F _u min	q ≈
	mm		mm	mm	mm	mm	mm	kN	kg/m
AL422	12.7	2X2	10.4	1.5	3.96	8.30	3.98	14.10	0.39
AL444		4X4				14.40		28.20	0.74
AL466		6X6				20.50		42.30	1.13
AL522	15.875	2X2	12.8	2.06	5.08	11.05	5.1	22.00	0.64
AL534		3X4				17.00		33.00	1.10
AL544		4X4				19.40		44.00	1.25
AL566		6X6				27.50		66.00	1.79
AL622	19.05	2X2	15.6	2.44	5.94	13.00	5.96	37.00	0.86
AL644		4X4				22.70		63.70	1.76
AL666		6X6				32.20		100.10	2.60
AL822	25.4	2X2	20.5	3.26	7.92	16.00	7.95	56.70	1.54
AL844		4X4				29.40		113.40	3.00
AL866		6X6				44.20		170.00	4.46
AL1022	31.75	2X2	25.6	4	9.53	19.60	9.56	88.50	2.37
AL1044		4X4				36.40		177.00	4.68
AL1066		6X6				52.30		265.00	7.20
AL1222	38.1	2X2	30.5	4.8	11.1	24.30	11.13	127.00	3.65
AL1244		4X4				43.80		254.00	7.05
AL1266		6X6				63.20		381.00	10.50
AL1444	44.45	4X4	36.4	5.65	12.7	51.30	12.69	372.70	10.34
AL1466		6X6				74.60		559.00	15.16
AL1644	50.8	4X4	41.6	6.45	14.27	58.10	14.24	471.00	12.98
AL1666		6X6				83.80		706.00	19.76

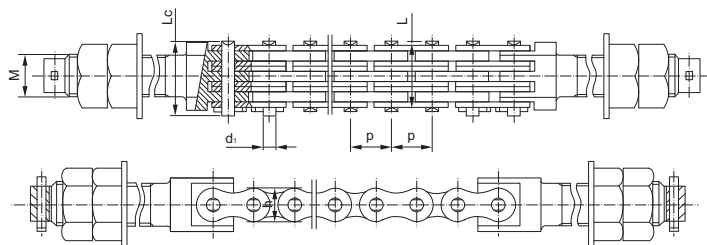

东风链号 Dongfeng Chain No.	节距 Pitch	销轴直径 Pin diameter	销轴长度 Width over bearing pins		链板高度 plates depth	链板厚度 Plate thickness	螺栓规格 Type of bolt	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Mass per meter
	p	d2 max	L max	Lc max	h2 max	T max	M	Fu min	Fua	q ≈
	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
LTLL1266	19.05	5.72	26.3	29.0	16.13	1.90	M20	86.7	99.8	2.00
LTAL666	19.05	5.94	32.2	35.1	15.60	2.44	M20	114.0	131.0	2.60

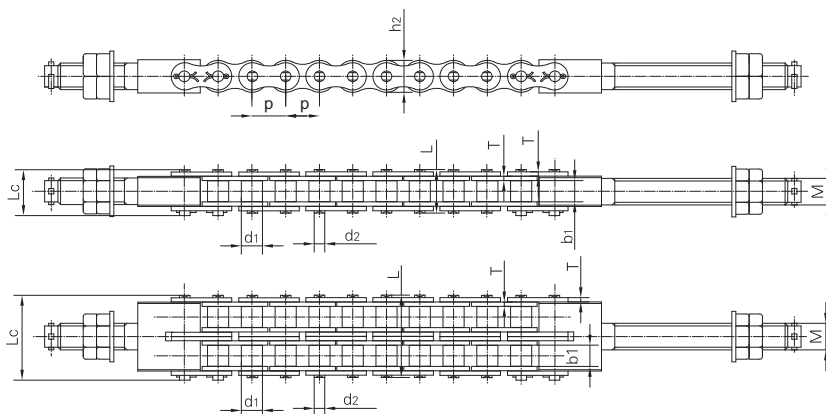

东风链号 Dongfeng Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Width over bearing pins		内链板高度 Inner plates depth	链板厚度 Plate thickness	螺栓规格 Type of bolt	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Mass per meter
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	M	Fu min	Fua	q ≈
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
LT80-1	25.40	15.88	15.75	7.92	32.7	36.5	24.0	3.25	M16/M20	71.55	81.8	2.60
LT80-2	25.40	15.88	15.75	7.92	62.7	65.8	24.0	3.25	M20	143.10	163.6	5.15
LT100-1	31.75	19.05	18.90	9.53	40.4	44.7	30.0	4.00	M24	107.85	118.6	3.91
LT100-2	31.75	19.05	18.90	9.53	76.4	80.5	30.0	4.00	M24	215.70	234.4	7.80
LT100-3	31.75	19.05	18.90	9.53	112.2	116.3	30.0	4.00	M24	323.55	351.6	11.77
LT120-1	38.10	22.23	25.22	11.10	50.3	54.3	35.7	4.80	M30	149.20	161.1	5.62
LT120-2	38.10	22.23	25.22	11.10	95.8	99.7	35.7	4.80	M30	298.40	322.2	11.20